

Autonomous Household Energy Management Using Deep Reinforcement Learning

Nathan Tsang
Department of Civil and Environmental Engineering
University of California, Berkeley
Berkeley, USA
nathan_tsang@berkeley.edu

Ashkan Yousefi
Department of Industrial Engineering and Operations Research
University of California, Berkeley
Berkeley, USA
ashkan.yousefi@gmail.com

Collin Cao
Department of Electrical Engineering and Computer Science
University of California, Berkeley
Berkeley, USA
collincao@berkeley.edu

Alexander Fred-Ojala
Department of Industrial Engineering and Operations Research
University of California, Berkeley
Berkeley, USA
afo@berkeley.edu

Serena Wu
Department of Electrical Engineering and Computer Science
University of California, Berkeley
Berkeley, USA
serena.wu@berkeley.edu

Zilin Yan
School of Economics and Management
Tsinghua University
Beijing, China
yanzl.16@sem.tsinghua.edu.cn

Abstract— With the massive growth of smart meters and availability of data, there is a unique opportunity to offer novel services to utility customers. The emergence of new technologies can be used to learn a customer's electrical consumption patterns and to offer customized solutions for minimizing electricity cost. One such technology is deep reinforcement learning (DRL), which is explored in this paper. The proposed approach for autonomous household energy management utilizes deep Q-learning with a novel method to deal with potential scalability issues that involves grouping dependent electrical devices. The defined reward function addresses the problems of previous research by adding more scenarios for the penalty and reward. Transfer learning using an adviser agent is also utilized to improve training time. By grouping dependent devices, we are able to resolve the problem of scalability. The results of these experiments demonstrate that DRL can be utilized to autonomously control household energy consumption.

Keywords—artificial intelligence, autonomous systems, energy management, reinforcement learning, q-learning

I. INTRODUCTION

With the recent improvements in technology in the building and infrastructure sectors, more buildings are utilizing smart electronic devices to reduce both their environmental footprint as well as their utility costs. This paper is motivated by the idea that optimal controllers can be installed in residential buildings to reduce carbon emissions and utility costs without perturbing the occupants' comfort or lifestyle. While energy management systems are common for newer commercial developments, they are uncommon in residential buildings. Instead of relying on smart controllers, devices are manually switched on and off by humans which results in energy inefficiencies and higher costs for homeowners and tenants.

A wide variety of methods have been proposed for use in a household smart controller such as dynamic programming, game theory, and Markov-Decision Processes. While these are effective in optimizing a building's energy use, they typically require a significant amount of information about the building to be optimized. This means that homeowners must

actively be involved in the installation and “tuning” stage of such a controller. A disadvantage of these methods is that they must be recomputed every time an optimization is required or its underlying assumptions have changed. This can be time consuming and limit the benefit of such systems in complex, changing environments, especially since it requires a certain level of homeowner involvement.

To solve the issues of computation time and generalization, we propose that such systems instead utilize deep reinforcement learning (DRL) because it has the ability to provide faster solutions and can better adapt to the changing environments without needing modifications to the underlying algorithms. In particular, this paper focuses on Q-learning (DQN) and Policy Gradients (DPG) because they are popular model-free RL algorithms that are frequently studied. Our research intends to answer the following questions: 1) Can DRL successfully reduce a household's daily electricity cost with minimal a priori knowledge of the household, and 2) Is DQN or DPG better suited for this particular application?

A. Primer on Reinforcement Learning (RL)

RL refers to an area of machine learning where the goal is to train an agent to interact with an environment to maximize some reward. An agent (e.g. robot, autonomous vehicle, energy management controller) can be any system or device that makes sequential decisions (i.e. whether to turn on or off an energy load) based on information received from an environment. The agent learns the optimal decisions, known as a policy, by first randomly taking actions and receiving feedback from the environment in the form of a reward. These rewards may be received immediately or they may be received after a time delay. The success of each action is measured by the discounted sum of its immediate and future rewards. These key components are conventionally represented in RL as:

- S is the set of permissible states.
- A is the set of permissible actions.
- R is the set of permissible rewards.

The interaction between an agent and the environment is depicted by a tuple (s, a, r, s') . This tuple represents an agent

that begins in state s , takes an action a , receives a reward r , and transitions to the next state s' .

While the goal of RL is to find the optimal policy, different RL algorithms achieve this using different methods. For instance, in Q-learning the optimal policy is derived from the value of being in each state and taking each action. Using Policy Gradients, the optimal policy is learned more directly.

Unlike Markov Decision Processes, some RL algorithms (e.g. DQN, DPG) are model-free and make no assumption about the transition function, from (s, a) to (r, s') . In other words, after enough training, the agent can act optimally in the environment by following its learned policy without having full knowledge of the environment. Using neural networks, the agent can approximate value functions, meaning that it will take optimal actions in states it has not yet visited. RL algorithms that utilize neural networks and deep learning can be applied at scale to environments that have infinite states.

B. Utilization of neural networks to improve scalability

Neural networks are a class of machine learning algorithms in which the architecture is made up of layers of neurons. A neuron calculates the linear sum of its inputs and then performs a non-linear transformation of that sum based on its activation function. There are several types of activation functions including Rectified Linear Units (ReLU), sigmoid, or hyperbolic tangents. In the first layer, the inputs are the data itself, while in the successive layers the inputs are the outputs from the previous layer. The output of the final layer represents the model's prediction. There are several types of neural network architectures, such as feed-forward, recurrent, and convolutional. Each of these may be considered deep neural networks if they consist of two or more layers, known as hidden layers, between the input and output layers.

In both DQN and DPG, the inputs to the network are features that represent the agent's state. In DQN, the outputs are the Q-values for each action given that state. In DPG, the outputs are the probability of taking each action given that state. In both cases, the network is a value function approximator and informs the agent about which action it should take. An example of a deep feed-forward network with two hidden layers is shown in Fig. 1, 2.

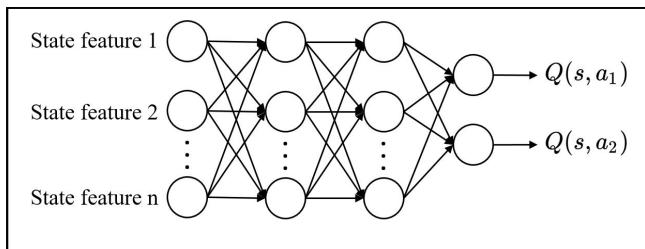


Figure 1. DNN configuration for DQN with two hidden layers

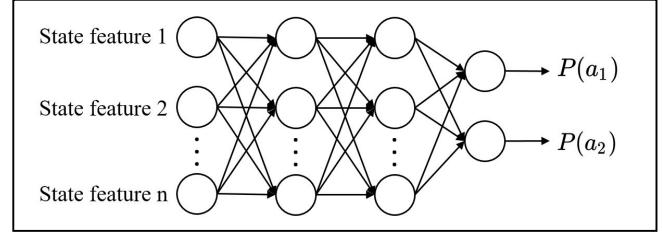


Figure 2. DNN configuration for DPG with two hidden layers.

C. RL algorithms explored in this paper

1) Q-learning

DQN is a machine learning algorithm in RL that combines the power of DNN with traditional (tabular) Q-learning. In Q-learning, the value function $Q^\pi(s, a)$ represents the total expected value of being in state s and taking action a based on policy π . After enough training, the agent learns $Q(s, a)$ and therefore which actions are optimal based on the current state. While tabular Q-learning stores the Q-values for each state in a matrix, DQN instead utilizes a DNN with parameter $\theta(Q(s, a, \theta))$ to approximate the Q-value function. By using a function approximator, DQN is scalable and can be used for complex environments, while tabular Q-learning is restricted to small state-spaces.

DQN is optimized by calculating loss as the mean-squared error in Q-values as shown in (1) and adjusting parameters θ based on the gradient (2).

$$\mathcal{L} = E[(r + \gamma \max_{a_{t+1}} Q(s_{t+1}, a_{t+1}, \theta) - Q(s_t, a_t, \theta))^2] \quad (1)$$

$$\frac{\partial \mathcal{L}(\theta)}{\partial \theta} = E[(r + \gamma \max_{a_{t+1}} Q(s_{t+1}, a_{t+1}, \theta) - Q(s_t, a_t, \theta)) \frac{\partial Q(s_t, a_t, \theta)}{\partial \theta}] \quad (2)$$

One key problem of DQN is that the neural network oscillates and diverges during training due to the model's sequential nature. To avoid this problem, DQN often uses experience replay to uncouple sequential states and improve performance. Experience replay is utilized by recording past state transitions (s_t, a_t, r_t, s_{t+1}) and storing them in a memory bank M . During the training process, transitions are randomly sampled from memory bank instead of the most recent transitions. The DQN algorithm used in this paper is illustrated in Algorithm 1.

Algorithm 1 DQN with experience replay

```

Initialize replay buffer D
Initialize  $Q$  as DNN with random weights  $\theta$ 
for each episode do
    Record initial state as  $s_1$ 
    for t in each time step do
        Choose random  $a_t$  with probability  $\varepsilon$ 
        Else choose  $a_t = \text{argmax}_a Q(\phi(s_t), a, \theta)$ 
        step the environment and observe  $r_t, x_{t+1}$ 
         $s_{t+1} \leftarrow [s_t, a_t, s_{t+1}]$ 
        Add  $s_{t+1}$  to the replay buffer D
         $s_i, a_i, r_i, s_{i+1}$  = sample batch from D
        if episode end at i then
             $y_i = r_i$ 
        else
             $y_i = r_i + \max(\hat{Q}(s_{i+1}, a', \theta))$ 
            Perform Gradient Descent on  $Q$ 
        end if
    end for
end for

```

2) Policy Gradient

It is suggested that the DPG can achieve a faster rate of convergence and requires less time compare to DQN. DPG does this by maximizing the expected reward by directly take the gradient on the policy (5).

$$\nabla E_{\pi_\theta}[r(\tau)] = E_{\pi_\theta}[r(\tau) \nabla \log(\pi_\theta(\tau))] \quad (3)$$

To solve for the above equation the algorithm need samples $x_i, p(x_i | \theta)$ to calculate the estimate gradient,

$$\nabla_i^\theta = r(x_i) \nabla \log(p(x_i | \theta)) \quad (4)$$

as moving the direction towards the gradient will increase the log probability of the sample x_i with reward $r(x_i)$.

Therefore, we take the gradient at the end of the game with the samples that are collected during the game as trajectory,

$$\tau = (s_0, a_0, r_0, \dots, s_{T-1}, a_{T-1}, r_{T-1}) \quad (5)$$

and the policy gradient compute the gradient based on the sample trajectory by calculating the derivative of log probability of the trajectory as in (8).

$$\frac{\partial}{\partial \theta} \log(p(\tau | \theta)) = \frac{\partial}{\partial \theta} \sum_{t=0}^{T-1} \log(\pi(a_t | s_t, \theta)) \quad (6)$$

The final gradient update for τ is (9).

$$\mathcal{R}_\tau \frac{\partial}{\partial \theta} \sum_{t=0}^{T-1} \log(\pi(a_t | s_t, \theta)) \quad (7)$$

In contrast to DQN, the DNN is used to estimate the probability of the action based on given θ . The agent evaluates the output of the DNN as the probability of taking each action. The given probability gives the randomness that sometime the model can explore undiscovered states whereas the DQN in contrast only give discrete decisions. The DPG algorithm used in this paper is illustrated in Algorithm 2.

Algorithm 2 DPG

```

Initialize hyper-parameters
Initialize DNN with random weights  $\theta$ 
for each time step do
    Sample actions with DNN
    Calculate probabilities by  $p(a|\theta, s)$  to A
    Record values of hidden layers of DNN to H
    Record  $s$  to S
    Step the environment to  $s'$ 
    Record reward  $r$  to R
    if episode is ended then
        Compute gradient  $\nabla$  from  $\tau = R, A, S, H, \theta$ 
        update  $\theta$  by gradient  $\nabla$ 
        clear  $R, A, S, H$  and reset the environment
         $s \leftarrow s'$ 
    end if
end for

```

II. LITERATURE REVIEW

For classic energy systems, the solution of using basic algorithms to optimize energy consumption is very mature [1] and have been successful in reducing energy cost [2]. Much of this research is focused on how to optimize large scale energy systems [3] because the introduction of renewable energy or other generation sources to the grid introduces new challenges to the existing system [4], [5]. To resolve or optimize these systems, recent research has utilized RL methods in addition to traditional algorithms [6].

There are also efforts to use RL to reduce energy cost in buildings [7]-[9]. Using DRL could further resolve many of the issues of the current framework [8]. However, the proposed methods are hard to implement and reproduce without further given data. One observation of the current DRL models is that they are unstable and need simulated environments to train many trials before testing in real energy systems.

To further optimize a household energy cost with DQN and DPG, we built a simulation environment and the designed algorithms to validate the current research. We also further expand the research with transfer learning methods in reinforcement learning [10] to speed up the training process and more adaptable to real world scenarios.

III. METHODS

The task of optimizing a building's energy use can be formulated into a RL problem because it involves sequential decision-making. Like all RL problems, a simulation environment (similar to OpenAI gym) is needed to evaluate the performance of the model before introducing it to real systems.

Our environment was constructed to represent a typical residential building as shown in [7]. As such, the simulation includes N electrical devices (e.g. AC, lights, receptacles), each with specific daily requirements. The observation of each device at time t is represented by a tuple represented as

$$obs = (t, s, e, d, l) \quad (8)$$

where $[s, e]$ is the permitted start and end operating interval, l is the electrical load requirement in kW, and d is the required daily usage duration. For example, a device that is permitted to operate between 6am–4pm, has a power

requirement of 1 kilowatt per hour, and is must run for at least 4 hours per day would have starting state as $obs = (0, 6, 16, 1, 4)$.

Each day, the schedule start s_i , schedule stop e_i , and required daily duration d_i were randomly generated for each device i . An example of such constraints for a given day is shown in Table I. In this paper, it was assumed that electricity costs are deterministic and follow the schedule outlined in Table II.

TABLE I. EXAMPLE OF DEVICE CONSTRAINTS

<i>Load, i</i>	<i>s</i>	<i>e</i>	<i>d</i>	<i>t</i>
1	8	20	4	6
2	12	13	2	1
3	11	14	1	3
4	1	24	3	5

TABLE II. ELECTRICITY COST SCHEDULE

<i>Time, t</i>	<i>Cost, λ</i>
1-12	5
13-14	12
15-18	5
19-21	10
22-24	5

To help with the training procedure, the reward function was constructed to include an additional factor $u_{i,t}$, which incentivizes devices that are on during the permitted time window and a penalizes devices that are on outside this window, as shown in (10).

$$u_{i,t} = \begin{cases} 10, & \text{if } a_{i,t} = 1, \text{ and } t \in [s_i, e_i] \\ -10, & \text{if } a_{i,t} = 1, \text{ and } t \notin [s_i, e_i] \\ 0, & \text{otherwise} \end{cases} \quad (9)$$

Using this reward function, each device is designed to have maximum reward of 110 and having 90 or higher rewards means the basic device requirements are satisfied. The success of each algorithm was benchmarked against this threshold.

A. Formulation as an Optimization Problem

To optimize energy use, the state space includes hour of the day t and electricity cost λ_t , in addition to the device requirements. Using these six features, the agent must ensure that the accumulated usage for each device is equal to its required usage by the end of each day. At each hour the agent decides which devices to turn on/off to satisfy these requirements and minimize total cost.

Minimizing total electricity cost J while satisfying the requirements outlined above is achieved by solving the following optimization problem.

$$\begin{aligned} \min \quad & J = \sum_{t=1}^{24} \sum_{i=1}^N a_{i,t} P_i \lambda_t \\ \text{s.t.} \quad & \sum_{t=s_i}^{e_i} P_i \Delta t \geq E_i, \quad \forall i \in 1, 2, \dots, N \\ & \lambda_t \geq 0, \quad \forall t \in 1, 2, \dots, 24 \\ & P_i \geq 0, \quad \forall i \\ & a_{i,t} \in [0, 1], \quad \forall i, t \\ & 1 \leq s_i \leq l_i \leq 24, \quad \forall i \in 1, 2, \dots, N \end{aligned} \quad (10)$$

Here, λ_t is the utility cost at time t , $a_{i,t}$ is the action of device i wherein $a = 0$ means the device is off and $a = 1$ means the device is on, P_i is the power requirement and E_i is the daily energy requirement for device i . While is assumed that the s , e and d remain unchanged throughout day, they vary between days. Thus, the agent must learn a policy that can be generalized across different constraints.

By convention, RL agents are constructed to maximize, not minimize a function. Thus, our reward function was equal to the negative of the cost function J .

B. Experimentation

In this project, we simulated two types of environments, one with a single device and another with multiple devices. In the single device environment, the agent only needs to decide a binary action – to turn the device either on or off at each hour.

To ensure the different algorithms were compared fairly, both algorithms utilized the same DNN and had similar learning rate and hyperparameters. The learning rate and discount factor was set to 0.01 and 0.95, respectively. Each model was trained with 1,500 episodes where each episode runs for one day (i.e. 24 time steps). For both DQN and DPG, the experiments use DNN with two fully-connected hidden layers of [32, 16] neurons and RELU as the activation function. The size of the memory bank M was 2,000 observations and the batch size was 256 observations. All experiments were run on the same machine to control for differences in processing speed.

The purpose for this simple environment is to test the performance of both DQN and DPG and verify whether the construction of our environment and reward function is appropriate and conducive for training an agent. Next, we utilized a multiple device environment which is more realistic for a residential building. In this environment, the agent must make multiple decisions at each hour to minimize total daily cost, increasing our state space by 2^N , where N is the number of devices.

Therefore, in addition to comparing the benefits and drawbacks of using DQN and DPG for household energy management, this paper studies the implications of multiple devices on space complexity and the impact of grouping devices on training efficiency.

1) *Space Complexity*: One of the disadvantages of using DQN is that the state space of the simulation grows exponentially for multiple device environments. The scalability of DPG is much better compared to DQN. The parameters only grow linearly as the device increase. For

three devices, the DPG's DNN output only has three neurons whereas the DQN has 2^3 neurons.

2) *Interdependence of Household Devices*: In a multiple device environment, it's important to note that devices may be dependent or independent to each other. While DPG is sufficiently good at managing multiple devices, its useful to exploit the interdependence of devices when implementing DQN. When the devices are independent, turning on or off one of the devices will not affect the reward or action of other devices. Thus, to properly control a set of independent devices, each device requires its own dedicated agent. When the devices are dependent to each other, multiple devices must be turned on simultaneously to distribute the task and achieve the requirements. The latter case is more complicated and the DQN will require extra resources to learn the optimal strategy. The implementation in this paper considers dependent devices.

IV. FINDINGS

A. Algorithm Type

The results of running DQN and DPG with a single-device and a three-device environment are shown in Fig. 4, 5. For a single device, DPG only requires few episodes to converge, while DQN requires about 800 episodes to achieve similar performance. DPG will converge very fast to the near optimal state where it tends to stay at a reward of around 90. DQN slowly improves to a higher reward and is stable at a reward of 102. DPG fails to find the optimum reward whereas DQN will continue to search for the global optimum. By directly calculating the gradient, DPG has a fast convergence speed in the single device environment scenario.

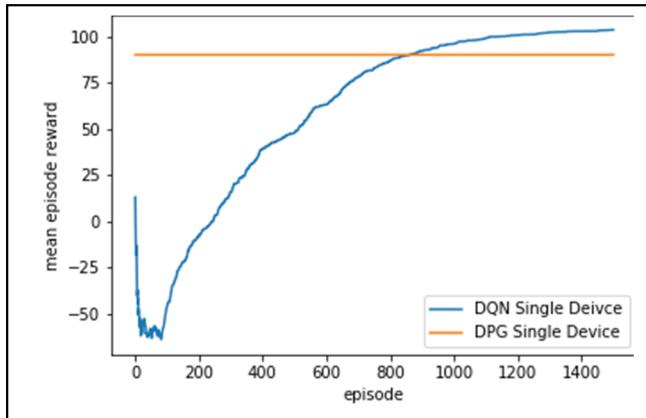


Figure 3. Mean reward during training process for DQN and DPG in a single-device environment.

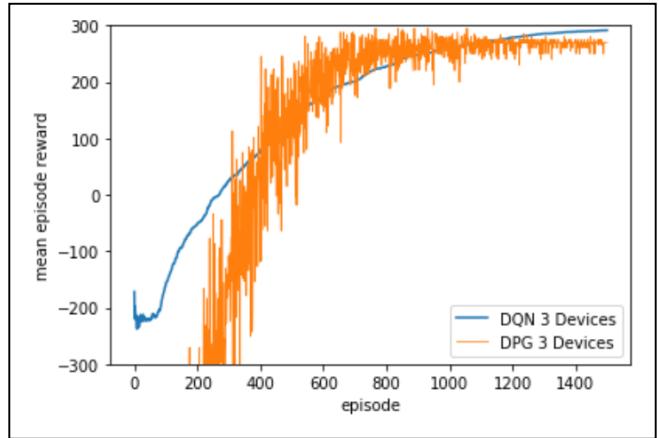


Figure 4. Mean reward during training process for DQN and DPG in a three-device environment.

In the 3-device environment, the reward of the randomly initialized models improves over time as both models learn a near-optimal policy. In general, DPG converges faster but some parameter initialization caused its reward to be stuck at a negative value. In contrast, DQN converges at a slower rate but eventually find the optimal loading strategy and has mean reward that exceeds that of DPG. Since DPG is unstable in some instances and generally fails to achieve a higher mean reward than DQN, our study focused on improving the DQN model.

B. Number of Devices vs. DQN Performance

To compare the performance of different number of devices, we averaged the mean reward per device. As the previous section discussed, the vanilla DQN use 2^N number of output neurons. The learning curve of different number of devices is plotted in Fig. 6. As the number of devices increases, the mean reward decreases slightly as a result of increasing state complexity. Due to the exponential nature of the DQN, the learning speed declines significantly between episodes 400 and 800.

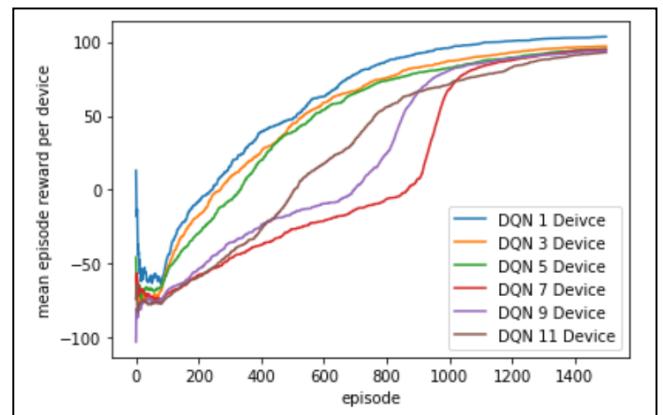


Figure 5. Learning curve and time required for training based on different number of devices.

C. Scalable Device Environments

Notice that in Fig. 7, the original (ungrouped) DQN training time increase exponentially as the number of devices increase. We proposed an idea using grouped agents to resolve this issue.

In most of the cases, devices are independent to each other. As a novel approach to solve this real-life scenario, we will implement multiple DQN agents at once, each of which being responsible for a group of dependent devices. By splitting independent devices, the training process is significantly faster. Moreover, as the number of groups increases, training time increase linearly instead of exponentially, as shown in Fig. 7.

Another major benefit of each group being independent is that we can parallel the training process and deploy the training in a distributed computing system.

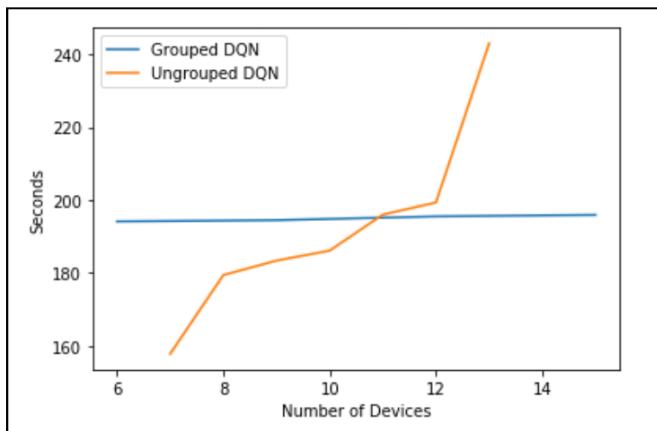


Figure 6. Training time of grouped agents and original approach.

D. Impact of Transfer Learning

One observation from the training is that the DRL methods, especially DQN, use significant amount of time to learn how to satisfy the user's requirement. To reduce training time, we utilized a method called transfer learning that transfer knowledge (in the form of an advised action) from one agent to another agent using an adviser.

We append the advised action to the state observation as a ,

$$(t, s, e, d, l) \rightarrow (t, s, r, d, l, a) \quad (11)$$

In transfer learning, one of the agents is advised by giving the trained model's prediction to another other agent. While two different agents might have different requirements, the trained agent is able to make reasonable actions based on past experience.

The advised agent learns 100-200 episode faster than our original agent and achieved a mean reward of 105 which is slightly higher than the normal agent's reward of 102 (Fig. 8). Thus, the advised agent has 25% better performance in energy saving (compared to a baseline of 90, where below 90 means agents are violating requirements). This method could be critical to a case when a requirement has changed and a new agent needs to be trained with limited time.

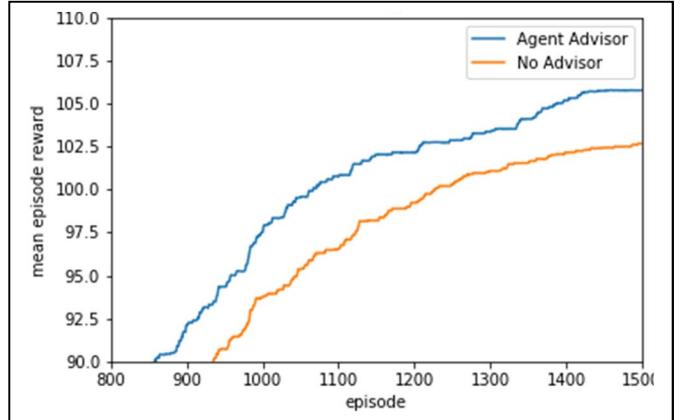


Figure 7. Mean reward during training with an adviser and without an adviser.

V. CONCLUSION

In this paper we successfully developed a DRL model to optimize the energy consumption of a single household building. We found that while DQN and DPG could both achieve a reasonable mean reward, DQN was more stable and had a generally better reward. For this reason, this paper focused on developing novel ways to improve DQN for our use case. DQN was successful at finding an optimal policy when considering multiple devices, although its performance per device slightly decreased. Due to the vanilla DQN's exponential nature, we utilized multiple agents that were each responsible for a group of dependent devices. This method is preferred because it scales linearly with the number of devices. To minimize training time, we utilized two methods to transfer knowledge from one agent to another.

It is recommended that the findings in this paper be further developed by testing it on more complex experiments that include stochastic features and more realistic constraints. These experiments could incorporate more electrical loads, variable on-site energy production (i.e. solar photovoltaics), energy storage devices, dynamic pricing of utilities, or stochastic demand of load sources. To be more useful in real-world applications, environmental constraints should be included (i.e. required temperature bands), which means that the environment would need to be more sophisticated. Future work could also study how to improve DPG stability and could assess the relative benefits of using different RL algorithms (e.g. DDPG, A2C, PPO) to control household energy consumption. To validate the experimental results, it would be useful to utilize an RL algorithm in a physical controller to conduct real-life experiments in a residential building.

ACKNOWLEDGMENT

Collin Cao and Nathan Tsang contributed equally to this paper.

REFERENCES

- [1] A. J. Wood and B. F. Wollenberg, *Power Generation, Operation and Control*. New York: Wiley, 2003.
- [2] B. R. Parekh, A. T. Davda, B. Azzopardi, and M. D. Desai, "Dispersed generation enable loss reduction and voltage profile improvement in distribution network-case study, Gujarat, India," IEEE Trans. Power Syst., vol. 29, no. 3, pp. 1242-1249, May 2014.
- [3] C. W. Gellings and W. M. Smith, "Integrating demand-side management into utility planning," Proc. of IEEE, vol. 77, no. 6, pp. 908-918, June 1989.

- [4] J. M. Carrasco et al., "Power-electronic systems for the grid integration of renewable energy sources: A survey," IEEE Trans. Ind. Electron., vol. 53, no. 4, pp. 1002-1016, June 2006.
- [5] S. Kouro, J. I. Leon, D. Vinnikov and L. G. Franquelo, Grid-connected photovoltaic systems: An overview of recent research and emerging PV converter technology, IEEE Ind. Electron. Mag., vol. 9, no. 1, pp. 47-61, March 2015.
- [6] S. Lakshminarayana, T. Q. S. Quek, and H. Vincent, "Poor cooperation and storage tradeoffs in power-grids with renewable energy resources." IEEE Trans. On Ind. Electron. Mag., vol 32, no. 1, pp.47-61, 2015.
- [7] T. Remani, E. A. Jasmin and T. P. I. Ahamed, "Residential load scheduling with renewable generation in the smart grid: a reinforcement learning approach," IEEE Systems Journal, pp. 1-12, 2018.
- [8] J. E. Mocanu, D. C. Mocanu, P. H. Nguyen, A. Liotta, M. E. Webber, M. Gibescu and J. G. Slootweg, "On-line building energy optimization using deep reinforcement learning," IEEE Trans. Smart Grid, 2018.
- [9] K. Dalamagkidis and D. Kolokotsa, "Reinforcement learning for building environmental control", in *Reinforcement Learning: Theory and Applications*. Vienna: I-Tech Education and Publishing, 2008, pp. 283-294.
- [10] M. E. Taylor and P. Stone, "Transfer learning for reinforcement learning domains: a survey," Journal of Machine Learning Research, vol. 10, pp. 1633-1685, 2009.